

## Unidirectional fabric data sheet


### Code #C219U

Characteristics		
	Nominal	Tolerance
Mass per unit of area (g/m <sup>2</sup> )	219	± 5%
Weave	Unidirectional, woven	
Laminate thickness (mm)	0,23*	n/a

Warp – Weft ratio		
	Warp	Weft
Fiber description	12K, T700 carbon fiber	Polyester
Thread count (ends/cm)	2,5	2,8
Weight distribution (g/mq)	201,48	17,52
Weight distribution (%)	92	8

(\*) Theoretical thickness of compressed epoxy laminate with 40% of reinforcement in volume.

Note: Technical information furnished is based on laboratory findings and believed to be correct. No warranties of any kind are made except that the materials supplied are of standard quality. All risk and liabilities arising from handling, storage and use of products, as well as compliance with applicable legal restrictions, rests with the user.

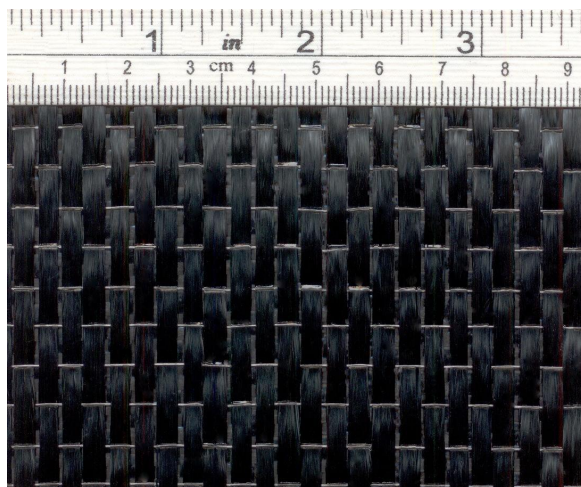

---

**SALES & ORDER PROCESSING**  
28<sup>th</sup> of October St No 8A, 37300  
Agria, Greece, EU

**EU ORDERING INFO**  
Tel: +302428092210  
Email: [sales@fibermxcomposites.com](mailto:sales@fibermxcomposites.com)

Head office: Fibremax Ltd  
35 Grafton Way, W1T 5DB  
London, UK